

MIX USED, SENIOR HOUSING

Construction Phasing, Schedule & Cost Proposal

A Mixed-Use Senior Housing, Communal Housing & Retail Development

Market Street Corridor, Downtown Oakland, California

Project Data	
Owner	The Senior Housing Group
Architect	MPA Design
General Contractor	Turner Construction
Total Gross Building Area (GBA)	32,500 SF (FAR 4.0)
Building Height	4 Stories
Anticipated Construction Start	September 3, 2027
Estimated Substantial Completion	February 2029 (~17-month duration)
Estimated Total Project Cost	\$17,300,000 (± planning-level estimate)

Part 1 — Proposal

1.1 Project Overview

Mix Used, Senior Housing is a four-story mixed-use development on the Market Street corridor in Downtown Oakland, California, combining ground-floor boutique retail, senior housing, and communal (co-living) housing around a central courtyard. The building totals approximately 32,500 SF of gross building area at FAR 4.0, organized as a transparent retail plinth at grade with two residential wings above — senior housing to the east and communal housing to the west — stepping back at the upper floors to create planted terraces. The design emphasizes daylighting through a central courtyard void, a vertical circulation spine for wayfinding, and a materials palette of light concrete, fiber-cement panel, perforated metal shading, and warm wood accents.

This proposal presents a planning-level construction phasing plan, project schedule, and cost estimate for Owner review, together with a set of illustrative project-administration documents (Part 2) representative of the reporting the Owner should expect to receive once construction is underway.

1.2 Construction Phasing

Construction is organized into fourteen sequential and overlapping phases, proceeding from site mobilization through owner move-in:

- Mobilization & Site Logistics — Contractor mobilization, temporary utilities, site fencing/logistics plan, survey control. Site is assumed cleared per prior massing/entitlement studies.
- Excavation & Foundations — Excavation, shoring as required, spread/mat footings and foundation walls for podium structure.
- Podium / Structural Concrete (Ground Floor) — Ground-floor structural concrete slab and retail-level structure supporting residential wings above.
- Vertical Structural Framing (Levels 2–4) — Wood-frame structure for senior housing and communal housing wings over the concrete podium.
- Building Envelope & Exterior Enclosure — Weather-resistive barrier, high-performance glazing, fiber-cement/concrete panel cladding, and perforated metal shading fins.
- MEP Rough-In (All Levels) — Electrical, plumbing, low-voltage, and HVAC rough-in throughout residential and retail levels.
- Retail Shell & Core / TI Coordination — Delivery of retail spaces as vanilla shell with coordination allowances for future tenant improvements.
- Interior Build-Out – Senior Housing Wing — Partitions, finishes, casework, and accessibility-compliant fixtures in the senior housing wing.
- Interior Build-Out – Communal Housing Wing — Partitions, finishes, and shared/communal-living amenity spaces in the west wing.
- Courtyard, Terraces & Landscape — Central courtyard hardscape/softscape, planted terrace waterproofing and planting, site lighting.
- Finishes, Fixtures & Equipment (FF&E) — Flooring, paint, lighting fixtures, appliances, and furnishing of common areas.
- Testing, Commissioning & Inspections — MEP systems testing/balancing, life-safety systems commissioning, City inspections.
- Punch List & Certificate of Occupancy — Deficiency correction, final walkthroughs, and Certificate of Occupancy issuance.
- Owner Move-In / Project Closeout — Owner move-in coordination, as-built documentation, warranty turnover, project closeout.

1.3 Project Schedule

Schedule Estimating Methodology: In the absence of a detailed CPM network, the overall project duration was estimated using a planning-level production rate of approximately 2,500 SF of gross building area per month for a wood-frame-over-

concrete-podium mixed-use building of this scale and complexity (32,500 SF ÷ 2,500 SF/month ≈ 13 months baseline). A 30% schedule contingency was then added to account for permitting variability, inspection cycles, weather (notably the Bay Area wet season), and construction-market supply/labor conditions (13 months × 1.30 ≈ 17 months). This yields an estimated overall duration of 17 months from a September 3, 2027 start to an estimated substantial completion in February 2029.

#	Phase	Approx. Start	Approx. End	Duration (mo.)
1	Mobilization & Site Logistics	Sept 2027	Sept 2027	0.5
2	Excavation & Foundations	Sept 2027	Nov 2027	2.0
3	Podium / Structural Concrete (Ground Fl.)	Nov 2027	Jan 2028	2.5
4	Vertical Structural Framing (Levels 2-4)	Jan 2028	Apr 2028	3.5
5	Building Envelope & Exterior Enclosure	Mar 2028	Jul 2028	3.5
6	MEP Rough-In (All Levels)	Mar 2028	Jul 2028	4.5
7	Retail Shell & Core / TI Coordination	Apr 2028	Jun 2028	2.5
8	Interior Build-Out – Senior Housing Wing	May 2028	Sept 2028	3.5
9	Interior Build-Out – Communal Housing Wing	Jun 2028	Sept 2028	3.5
10	Courtyard, Terraces & Landscape	Jul 2028	Oct 2028	3.0
11	Finishes, Fixtures & Equipment (FF&E)	Aug 2028	Nov 2028	3.0
12	Testing, Commissioning & Inspections	Nov 2028	Jan 2029	2.0
13	Punch List & Certificate of Occupancy	Dec 2028	Jan 2029	1.0
14	Owner Move-In / Project Closeout	Jan 2029	Feb 2029	0.5

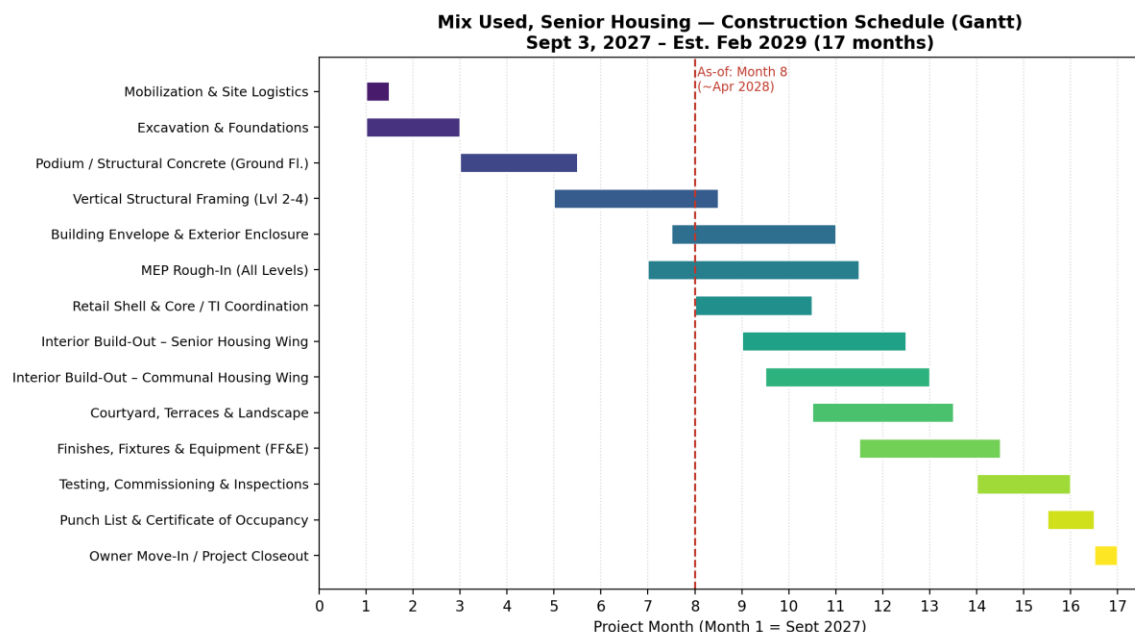


Figure 1: Construction schedule Gantt chart, Month 1 = September 2027. The dashed line marks Month 8 (~April 2028), the illustrative "as-of" status date used for the Part 2 project-administration documents.

1.4 Cost Estimate

Cost Estimating Methodology: Hard construction costs were estimated by applying planning-level unit costs (\$/SF) to each program component's area, differentiated by use type to reflect relative finish level and building-system intensity (e.g., senior

housing carries a higher \$/SF than a retail vanilla shell). Consistent with the schedule contingency above, a 30% allowance was then added on top of the base hard-cost subtotal to cover design contingency, escalation to a 2027–2028 start, and general conditions/fee — appropriate for this early planning stage in advance of a detailed GC estimate or subcontractor buyout.

Program Component	Area (SF)	% of GBA	\$/SF	Estimated Cost
Retail – Ground Floor	6,500	20%	\$350	\$2,275,000
Lobby / Core	3,250	10%	\$450	\$1,462,500
Service / Back-of-House	1,625	5%	\$300	\$487,500
Senior Housing	9,750	30%	\$460	\$4,485,000
Communal Housing	9,750	30%	\$430	\$4,192,500
Planted Terrace / Landscape	1,625	5%	\$250	\$406,250
Total GBA				32,500 SF
Base Hard Construction Cost Subtotal				\$13,308,750
Contingency / Escalation / GC Fee Allowance (+30%)				\$3,992,625
Estimated Total Project Cost				\$17,301,375
Estimated Cost per SF (all-in)				≈ \$532 / SF

Note: These figures are planning-level, order-of-magnitude estimates prepared for an academic/illustrative proposal. They are not a Contractor bid or a substitute for a detailed quantity take-off, geotechnical/structural analysis, or current Bay Area bid-market pricing, all of which should be obtained before this estimate is relied upon for financing or entitlement purposes.

Part 2 — Project Administration Documents

Construction has not yet begun as of this proposal (anticipated start: September 3, 2027). The four documents below are illustrative examples, prepared as if the project were at Month 8 of the 17-month schedule (approximately April 2028) — a representative mid-construction milestone at which vertical framing is substantially complete and building envelope and MEP rough-in are underway (see Figure 1). Project names, dates, and field conditions are representative rather than actual field-verified data.

2.1 Site Observation Report

Field	Detail
Report No.	SOR-008
Date	April 10, 2028
Project	Mix Used, Senior Housing — Market Street Corridor, Downtown Oakland, CA
Weather / Site Conditions	Partly cloudy, 58°F, light wind — no weather-related delays
Personnel Present	Site Superintendent (Turner Construction); Project Architect representative (MPA Design); Owner's Representative (The Senior Housing Group)

Observations: Vertical structural framing at Levels 3–4 is substantially complete; the framing crew is mobilizing to Level 4 parapet and roof blocking. The building envelope subcontractor is installing the weather-resistive barrier and beginning perforated-metal shading-fin brackets at the south (retail) façade. MEP rough-in is progressing at Levels 2–3 (electrical conduit, plumbing DWV stacks). Retail-level slab-on-grade patching at the storefront line is complete.

Quality / Safety: Fall-protection guardrail at the Level 4 terrace edge (west wing) was not yet installed at the time of the walk; flagged to the GC superintendent for same-day correction. No other safety non-conformances observed. Framing tolerances spot-checked at grid lines 4–7 were within allowable tolerance.

Photos Referenced: Photo 1 — Level 4 framing, west wing. Photo 2 — WRB installation, south façade. Photo 3 — MEP rough-in, Level 2 corridor. Photo 4 — guardrail gap, Level 4 terrace edge.

Action Items: (1) GC to install missing guardrail at Level 4 terrace edge by end of day. (2) Confirm root-barrier/waterproofing detail per RFI-014 prior to terrace slab topping pour. (3) Schedule envelope mock-up review for the perforated metal screen fastening pattern.

2.2 RFI Response

Field	Detail
RFI No.	RFI-014
Date Submitted	April 8, 2028
Date Responded	April 15, 2028
Subject	Waterproofing & drainage detail at Level 2 planted terrace over occupied lobby below
Originator	Turner Construction (GC), on behalf of waterproofing/landscape subcontractor
Respondent	MPA Design (Architect of Record)

Question: Drawings A-501 and L-201 appear to conflict between the specified two-ply hot-applied waterproofing membrane detail and the root-barrier/drainage-mat assembly at the planted-terrace slab edge where it meets the glass lobby curtain wall below (Detail 4/A-502). Please clarify correct sequencing and termination, and confirm compatibility of the specified root barrier with the structural waterproofing warranty.

Response: Sequence from structural slab outward is as follows: (1) structural concrete slab; (2) two-ply hot-applied waterproofing membrane, turned up a minimum of 8 inches at the parapet/curtain-wall interface and terminated behind the curtain-wall sill flashing; (3) protection board; (4) drainage mat; (5) filter fabric; (6) growing medium. The root barrier shall extend a minimum of 12 inches beyond the planter edge and turn up behind the sill flashing to match the waterproofing termination. Root barrier and waterproofing membrane shall be sourced from the same manufacturer's approved system list to preserve the 20-year manufacturer warranty. A revised detail will be issued via ASI/Bulletin 006 for incorporation into the subcontractor's shop drawings.

Schedule Impact: None, provided the revised submittal is approved within 5 business days of ASI issuance.

Cost Impact: None — revised sequencing/detail only; no change in scope or material quantities.

2.3 Construction Progress Summary

Field	Detail
Reporting Period	March 26 – April 25, 2028 (Month 8 of 17)
Overall Schedule Elapsed	8 of 17 months (47%)
Overall Physical Completion (est.)	≈ 42%
Cumulative Spend to Date	≈ \$7.1M of \$17.3M (≈ 41%)

Percent Complete by Phase:

Phase	% Complete
Mobilization & Site Logistics	100%
Excavation & Foundations	100%
Podium / Structural Concrete	100%
Vertical Structural Framing	85%
Building Envelope & Exterior Enclosure	15%
MEP Rough-In	20%
Retail Shell & Core / TI Coordination	5%
Interior Build-Out (both wings)	0%
Courtyard, Terraces & Landscape	0%
Finishes, Fixtures & Equipment	0%
Testing, Commissioning, Closeout	0%

Milestones Achieved This Period: Vertical structural framing substantially topped out (Level 4 complete); building envelope installation started at the south façade; MEP rough-in underway at Levels 2–3; RFI-014 (terrace waterproofing detail) resolved with no schedule or cost impact.

Schedule Status: On track. Physical completion (≈42%) is tracking consistently with schedule elapsed (47%), reflecting the normal early-phase weighting toward structure and shell; no float has been consumed on the critical path.

Budget Status: On track. Cumulative spend (≈41%) is consistent with physical progress and the approved cost estimate; no change orders issued to date.

Issues / Blockers: Minor safety corrective action (missing guardrail) identified and closed same day (see Site Observation Report SOR-008). Awaiting subcontractor submittal approval on the root-barrier system tied to RFI-014.

Planned for Next Period: Complete building envelope on south and east elevations; complete MEP rough-in at Level 4; begin retail TI coordination meetings with GC; begin interior framing and rough-in inspections in the senior housing wing.

2.4 Risk Log

ID	Description	Category	Likel.	Impact	Mitigation Strategy	Owner	Status
R-01	Long-lead fabrication of custom perforated metal shading fins	Schedule	Medium	High	Release fabrication 4 weeks ahead of need date; qualify a backup fabricator	GC (Turner)	Monitoring
R-02	Waterproofing/drainage detail conflicts at planted terraces over occupied space	Quality	Medium	Medium	Standardize detail per RFI-014 resolution; require pre-installation mock-up	Architect (MPA Design)	Open
R-03	Wet-season delays to envelope and landscape work (Nov–Mar)	Weather	High	Medium	Sequence envelope dry-in ahead of rainy season; temporary weather protection	GC (Turner)	Monitoring
R-04	Senior housing accessibility compliance (Title 24 / ADA / FHA) in framing & rough-in	Compliance	Low	High	Third-party accessibility review at framing and rough-in milestones	Architect / Owner	Open
R-05	Retail tenant improvement scope undefined (tenants not yet signed)	Cost / Schedule	High	Medium	Deliver vanilla shell; carry TI allowance; coordinate flexible utility stub-outs	Owner	Monitoring
R-06	Construction cost escalation / material price volatility (steel, glazing)	Cost	Medium	High	Early procurement of glazing and structural steel; 30% contingency held	Owner / GC	Monitoring
R-07	Subcontractor & skilled-labor availability amid regional multifamily volume	Schedule	Medium	Medium	Early subcontractor buyout; confirmed manpower commitments at key trades	GC (Turner)	Monitoring
R-08	City of Oakland plan-check / inspection turnaround delays	Regulatory / Schedule	Medium	Medium	Pre-application meetings; expedited plan check where available; schedule float	Owner / Architect	Monitoring

Construction Cost Benchmarking

Mix Used, Senior Housing — Cost Estimate vs. San Jose / Bay Area Market Data

Purpose

This memo compares the construction cost assumptions used in the Mix Used, Senior Housing proposal against published market benchmarks and a real, recently financed San Jose project, to assess whether the proposal's \$/SF assumptions are realistic for a 2027–2028 Bay Area construction start.

What Was Used in the Proposal

The proposal applied a blended hard-cost rate by program component (retail \$350/SF, lobby/core \$450/SF, service/BOH \$300/SF, senior housing \$460/SF, communal housing \$430/SF, landscape \$250/SF), yielding a **\$409/SF blended hard construction cost** across the 32,500 SF program. A 30% contingency/escalation/GC-fee allowance was then added on top, for an **all-in total project cost of \$532/SF** (~\$17.3M total).

Market Research Findings

Source	Metric	Figure
RSMeans 2026	National mid-rise (4-7 story) apartment, hard cost	\$210–\$475 / SF
designandbids.com 2026 aggregator	California apartments generally	\$300–\$600 / SF
Same source	High-cost markets (e.g., San Francisco) high-rise	can exceed \$450 / SF
CBRE 2026 Senior Housing Survey	National avg., all care types — hard cost	\$262.75 / SF
Same survey	National avg. — total incl. soft costs & site	~\$364 / SF
Terner Center (UC Berkeley), actual CA permit data	Bay Area apartment hard cost (2018 dollars)	>\$380 / SF
Same study	Bay Area premium over rest of CA (controlled)	+\$81 / SF
Same study	Type I (concrete/steel) premium over other types	+\$65–\$71 / SF
Real San Jose comp: 797 S. Almaden Ave (99-unit mixed-use, ground-floor retail, 2025 financing)	Total development cost, all-in	\$996,000/unit; ~\$850–900 / SF

Note: the Terner Center figures are the most useful apples-to-apples read because they come from actual California building-permit data rather than a marketing cost calculator. Escalating the 2018 Bay Area hard-cost benchmark (\$380/SF) forward at a conservative 4–5%/year construction-cost inflation rate (RLB's current national annualized rate is roughly 4%, and the Bay Area has historically run hotter) puts **2027–2028 Bay Area hard costs at roughly \$550–\$650/SF** for a wood-frame-over-podium building — before any senior-housing accessibility/life-safety premium.

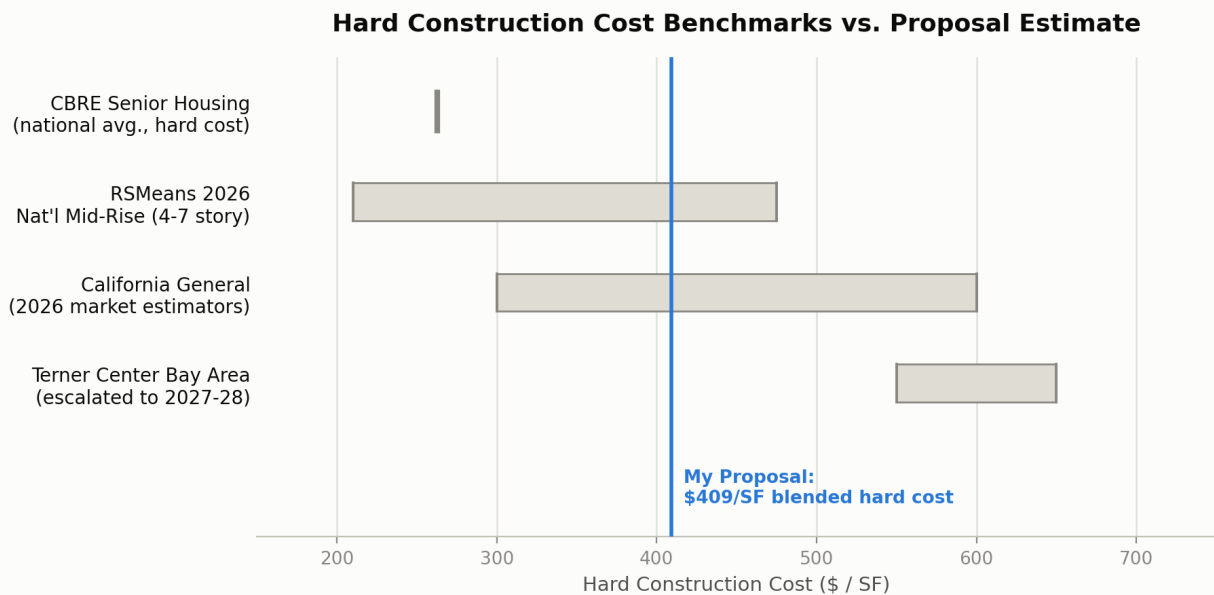


Figure 1: Published hard-construction-cost benchmarks (gray ranges) against the proposal's \$409/SF blended estimate (blue line). The proposal sits inside the RSMean and California general ranges, but below the Bay Area-specific (Turner Center) benchmark once escalated to a 2027–2028 start.

Comparative Analysis

The \$409/SF blended hard-cost assumption used in the proposal is defensible against broad national and statewide ranges, but it tracks closer to 2018 Bay Area pricing than to a realistic 2027–2028 estimate, and it does not fully capture the added cost of the senior-housing component (accessibility compliance, life-safety systems, higher finish standards). The real San Jose comparable — a 99-unit mixed-use building with ground-floor retail, similar in program to this proposal — closed construction financing in late 2025 at roughly \$850–\$900/SF all-in, well above the proposal's \$532/SF all-in total.

That comparable is not a clean apples-to-apples number: it is publicly financed affordable housing, which carries prevailing-wage labor requirements, a longer CEQA/entitlement timeline, and a deeper soft-cost and developer-fee stack than a typical privately financed project. Even discounting for that premium, however, the gap between \$532/SF and \$850–900/SF is large enough to signal that the proposal's total is understated for current Bay Area conditions.

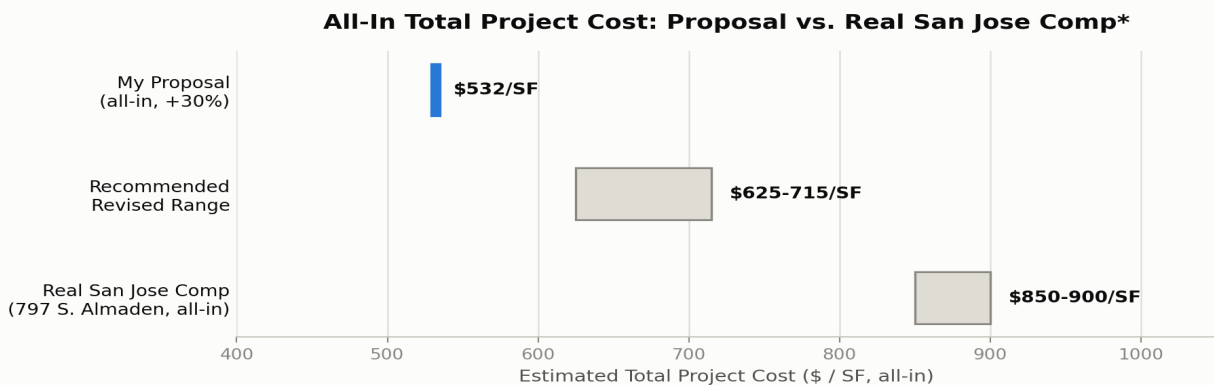


Figure 2: All-in total project cost per SF — the proposal's \$532/SF sits well below both a revised recommended range and the real San Jose all-in comparable (different cost basis; see note above).

Recommendation

For a more defensible 2027–2028 Bay Area estimate, revise the blended hard-cost rate to roughly **\$480–\$550/SF** (still conservative relative to the Turner-escalated \$550–650/SF range), which would bring the all-in total (with the same 30% contingency/escalation/fee allowance) to approximately **\$625–\$715/SF**, or roughly **\$20.3M–\$23.2M** total project cost for the 32,500 SF program — still meaningfully below the San Jose affordable-housing comparable, consistent with this being a privately financed project rather than a publicly funded one.

Sources

- RLB Construction Cost Report North America Q1 2026 — rlb.com/americas/insight/rlb-construction-cost-report-north-america-q1-2026
- CBRE, 2026 Senior Housing Development Costs — cbre.com/insights/briefs/2026-senior-housing-development-costs
- Turner Center for Housing Innovation (UC Berkeley), The Hard Costs of Construction: Recent Trends in Labor and Materials Costs for Apartment Buildings in California — turnercenter.berkeley.edu/research-and-policy/hard-construction-costs-apartments-california
- The Real Deal, "San Jose affordable housing project secures \$82M in construction financing," Nov. 2025 — therealdeal.com/san-francisco/2025/11/12/san-jose-affordable-housing-project-secures-82-million-debt
- RSMeans, "How Much Does It Cost to Build an Apartment Complex" (2026 data) — rsmeans.com/resources/how-much-does-it-cost-to-build-an-apartment-complex
- designandbids.com, "Apartment Construction Cost Per Square Foot (2026 Guide)" — designandbids.com/apartment-construction-cost-per-square-foot

Prepared as a supplementary research memo for the Mix Used, Senior Housing construction proposal. Figures are planning-level estimates for an academic exercise, not a substitute for a licensed estimator's quantity take-off or current subcontractor bid pricing.